


Single Row Tapered Roller Bearing

30300 Series-30352J2

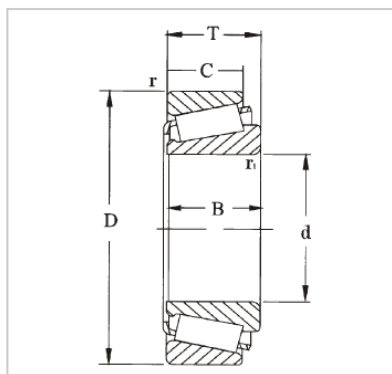

WUXI GUANGQIANG BEARING TRADE CO.,LTD

Designação	30352J2
Dimensões principais (mm)	
d1	260
D	540
B	113
Classificações básicas de carga (KN)	
dyc (Cr)	2120
stc (Cor)	3050
Pu	250
Avaliações de velocidade (rpm)	
Classificações de velocidade	850
Limitando a velocidade	1200
Peso (Kg)	110
ISO335	
Dimensões (ABMA)	1-1 / 16
Dimensões [mm]	
d	260
d1	376
B	102
C	85
r1,2 (min)	6
r3,4 (min)	6
uma	97
Dimensões de abutment e filete [mm]	
da (max)	325
db (min)	286
Da (min)	461
Da (max)	514
Db (min)	493
Ca (min)	15
Cb (min)	28
ra (max)	5
rb (max)	5
Valor	
e	0.35
Y	1.7
Yo	0.9

GQZ high quality 30300 Series Single Row Tapered Roller Bearing

Tapered roller bearings have tapered inner and outer raceways and rollers to handle simultaneous radial and thrust loads. Their axial load carrying capacity is directly related to the contact angle of the rollers and raceway shaft.

They are available in single-row, double-row, and four-row designs. The individual parts of tapered roller bearings are commonly sold separately as cups and cones. Cones contain the roller assembly and inner ring while cups include the outer ring. Full assembly units contain both the cup and cone. As separable bearings, different designs and sizes are available to accommodate a variety of applications.

Wuxi Guangqiang Bearing Trade Co.,Ltd-Tel:86-510-82601571-Email:gq@gqbearing.com,shary@gqbearing.com-http://www.bearing-asia.com