


Single Row Tapered Roller Bearing

32000 Series-32038X

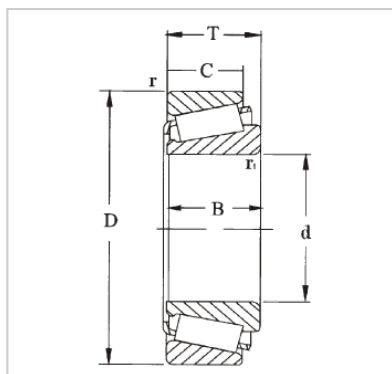

WUXI GUANGQIANG BEARING TRADE CO.,LTD

Designação	32038X
Dimensões principais (mm)	
d1	190
D	290
B	64
Classificações básicas de carga (KN)	
dyc (Cr)	660
stc (Cor)	1200
Pu	112
Avaliações de velocidade (rpm)	
Classificações de velocidade	1500
Limitando a velocidade	2000
Peso (Kg)	15.0
ISO335	
Dimensões (ABMA)	4FD
Dimensões [mm]	
d	190
d1	240
B	64
C	48
r1,2 (min)	3
r3,4 (min)	2.5
uma	62
Dimensões de abutment e filete [mm]	
da (max)	210
db (min)	204
Da (min)	257
Da (max)	276
Db (min)	279
Ca (min)	10
Cb (min)	16
ra (max)	2.5
rb (max)	2
Valor	
e	0.44
Y	1.35
Yo	0.8

GQZ high quality 32000 Series Single Row Tapered Roller Bearing

Tapered roller bearings have tapered inner and outer raceways and rollers to handle simultaneous radial and thrust loads. Their axial load carrying capacity is directly related to the contact angle of the rollers and raceway shaft.

They are available in single-row, double-row, and four-row designs. The individual parts of tapered roller bearings are commonly sold separately as cups and cones. Cones contain the roller assembly and inner ring while cups include the outer ring. Full assembly units contain both the cup and cone. As separable bearings, different designs and sizes are available to accommodate a variety of applications.

Wuxi Guangqiang Bearing Trade Co.,Ltd-Tel:86-510-82601571-Email:gq@gqbearing.com,shary@gqbearing.com-http://www.bearing-asia.com