


Single Row Tapered Roller Bearing

32300 Series-32317BJ2

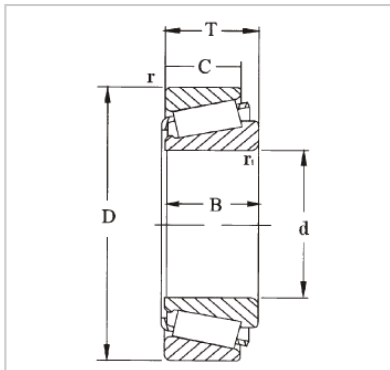

WUXI GUANGQIANG BEARING TRADE CO.,LTD

Designação	32317BJ2
Dimensões principais (mm)	
d1	85
D	180
B	63.5
Classificações básicas de carga (KN)	
dyc (Cr)	391
stc (Cor)	560
Pu	62
Avaliações de velocidade (rpm)	
Classificações de velocidade	2800
Limitando a velocidade	4000
Peso (Kg)	7.50
ISO335	
Dimensões (ABMA)	5GD
Dimensões [mm]	
d	85
d1	135
B	60
C	49
r1,2 (min)	4
r3,4 (min)	3
uma	52
Dimensões de abutment e filete [mm]	
da (max)	102
db (min)	99
Da (min)	138
Da (max)	166
Db (min)	169
Ca (min)	7
Cb (min)	14.5
ra (max)	3
rb (max)	2.5
Valor	
e	0.54
Y	1.1
Yo	0.6

GQZ high quality 32300 Series Single Row Tapered Roller Bearing

Tapered roller bearings have tapered inner and outer raceways and rollers to handle simultaneous radial and thrust loads. Their axial load carrying capacity is directly related to the contact angle of the rollers and raceway shaft.

They are available in single-row, double-row, and four-row designs. The individual parts of tapered roller bearings are commonly sold separately as cups and cones. Cones contain the roller assembly and inner ring while cups include the outer ring. Full assembly units contain both the cup and cone. As separable bearings, different designs and sizes are available to accommodate a variety of applications.

Wuxi Guangqiang Bearing Trade Co.,Ltd-Tel:86-510-82601571-Email:gq@gqbearing.com,shary@gqbearing.com-http://www.bearing-asia.com