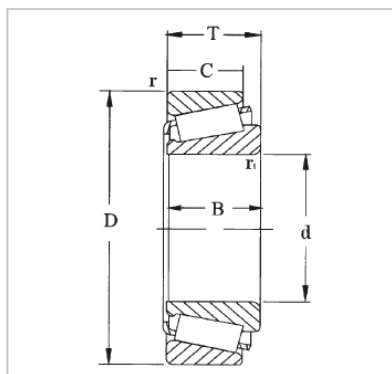


Single Row Tapered Roller Bearing

32300 Series-**32320J2**

BEARING

WUXI GUANGQIANG BEARING TRADE CO.,LTD

Designação	32320J2
Dimensões principais (mm)	
d1	100
D	215
B	77.5
Classificações básicas de carga (KN)	
dyc (Cr)	572
stc (Cor)	780
Pu	83
Avaliações de velocidade (rpm)	
Classificações de velocidade	2200
Limitando a velocidade	3000
Peso (Kg)	12.5
ISO335	
Dimensões (ABMA)	2GD
Dimensões [mm]	
d	100
d1	151
B	73
C	60
r1,2 (min)	4
r3,4 (min)	3
uma	51
Dimensões de abutment e filete [mm]	
da (max)	123
db (min)	115
Da (min)	177
Da (max)	201
Db (min)	200
Ca (min)	8
Cb (min)	17.5
ra (max)	3
rb (max)	2.5
Valor	
e	0.35
Y	1.7
Yo	0.9

GQZ high quality 32300 Series Single Row Tapered Roller Bearing

Tapered roller bearings have tapered inner and outer raceways and rollers to handle simultaneous radial and thrust loads. Their axial load carrying capacity is directly related to the contact angle of the rollers and raceway shaft.

They are available in single-row, double-row, and four-row designs. The individual parts of tapered roller bearings are commonly sold separately as cups and cones. Cones contain the roller assembly and inner ring while cups include the outer ring. Full assembly units contain both the cup and cone. As separable bearings, different designs and sizes are available to accommodate a variety of applications.

Wuxi Guangqiang Bearing Trade Co.,Ltd-Tel:86-510-82601571-Email:gq@gqbearing.com,shary@gqbearing.com-http://www.bearing-asia.com