


Single Row Tapered Roller Bearing

32000 Series-32019X/Q

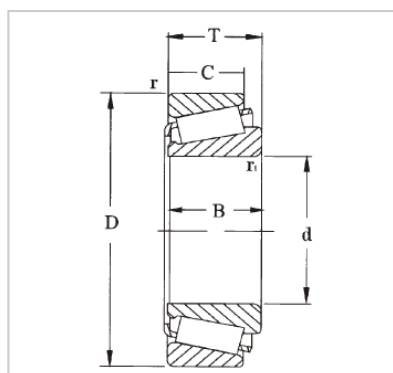

BEARING

WUXI GUANGQIANG BEARING TRADE CO.,LTD

Designação	32019X/Q
Dimensões principais (mm)	
d1	95
D	145
B	32
Classificações básicas de carga (KN)	
dyc (Cr)	168
stc (Cor)	270
Pu	30.5
Avaliações de velocidade (rpm)	
Classificações de velocidade	3200
Limitando a velocidade	4300
Peso (Kg)	1.80
ISO335	
Dimensões (ABMA)	4CC
Dimensões [mm]	
d	95
d1	120
B	32
C	24
r1,2 (min)	2
r3,4 (min)	1.5
uma	31
Dimensões de abutment e filete [mm]	
da (max)	105
db (min)	104
Da (min)	130
Da (max)	138
Db (min)	139
Ca (min)	6
Cb (min)	8
ra (max)	2
rb (max)	1.5
Valor	
e	0.44
Y	1.35
Yo	0.8

GQZ high quality 32000 Series Single Row Tapered Roller Bearing

Tapered roller bearings have tapered inner and outer raceways and rollers to handle simultaneous radial and thrust loads. Their axial load carrying capacity is directly related to the contact angle of the rollers and raceway shaft.

They are available in single-row, double-row, and four-row designs. The individual parts of tapered roller bearings are commonly sold separately as cups and cones. Cones contain the roller assembly and inner ring while cups include the outer ring. Full assembly units contain both the cup and cone. As separable bearings, different designs and sizes are available to accommodate a variety of applications.

Wuxi Guangqiang Bearing Trade Co.,Ltd-Tel:86-510-82601571-Email:gq@gqbearing.com,shary@gqbearing.com-http://www.bearing-asia.com