


## Single Row Tapered Roller Bearing

33000 Series-33030

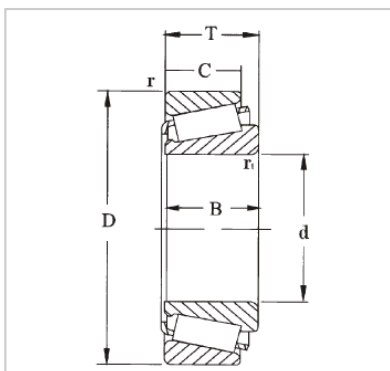

BEARING

WUXI GUANGQIANG BEARING TRADE CO.,LTD

Designação	<b>33030</b>
Dimensões principais (mm)	
d1	150
D	225
B	59
Classificações básicas de carga (KN)	
dyc (Cr)	457
stc (Cor)	865
Pu	86.5
Avaliações de velocidade (rpm)	
Classificações de velocidade	2000
Limitando a velocidade	2600
Peso (Kg)	8.15
ISO335	
Dimensões (ABMA)	2EE
Dimensões [mm]	
d	150
d1	188
B	59
C	46
r1,2 (min)	<b>3</b>
r3,4 (min)	2.5
uma	48
Dimensões de abutment e filete [mm]	
da (max)	164
db (min)	162
Da (min)	200
Da (max)	213
Db (min)	217
Ca (min)	8
Cb (min)	13
ra (max)	2.5
rb (max)	2
Valor	
e	0.37
Y	1.6
Yo	0.9

## GQZ high quality 33000 Series Single Row Tapered Roller Bearing

Tapered roller bearings have tapered inner and outer raceways and rollers to handle simultaneous radial and thrust loads. Their axial load carrying capacity is directly related to the contact angle of the rollers and raceway shaft.

They are available in single-row, double-row, and four-row designs. The individual parts of tapered roller bearings are commonly sold separately as cups and cones. Cones contain the roller assembly and inner ring while cups include the outer ring. Full assembly units contain both the cup and cone. As separable bearings, different designs and sizes are available to accommodate a variety of applications.

Wuxi Guangqiang Bearing Trade Co.,Ltd-Tel:86-510-82601571-Email:gq@gqbearing.com,shary@gqbearing.com-http://www.bearing-asia.com