


Single Row Tapered Roller Bearing

33100 Series-33118/Q



WUXI GUANGQIANG BEARING TRADE CO.,LTD

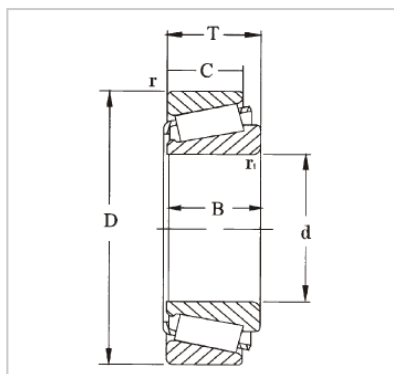

Designação	33118/Q
Dimensões principais (mm)	
d1	90
D	150
B	45
Classificações básicas de carga (KN)	
dyc (Cr)	251
stc (Cor)	390
Pu	43
Avaliações de velocidade (rpm)	
Classificações de velocidade	3000
Limitando a velocidade	4300
Peso (Kg)	3.10
ISO335	
Dimensões (ABMA)	3DE
Dimensões [mm]	
d	90
d1	120
B	45
C	35
r1,2 (min)	2.5
r3,4 (min)	2
uma	35
Dimensões de abutment e filete [mm]	
da (max)	101
db (min)	101
Da (min)	130
Da (max)	140
Db (min)	144
Ca (min)	7
Cb (min)	10
ra (max)	2
rb (max)	2
Valor	
e	0.4
Y	1.5
Yo	0.8

GQZ high quality 33100 Series Single Row Tapered Roller Bearing

Tapered roller bearings have tapered inner and outer raceways and rollers to handle simultaneous radial and thrust loads. Their axial load carrying capacity is directly related to the contact angle of the rollers and raceway shaft.

They are available in single-row, double-row, and four-row designs. The individual parts of tapered roller bearings are commonly sold separately as cups and cones. Cones contain the roller assembly and inner ring while cups include the outer ring. Full assembly units contain both the cup and cone. As separable bearings, different designs and sizes are available to accommodate a variety of applications.

Wuxi Guangqiang Bearing Trade Co.,Ltd-Tel:86-510-82601571-Email:gq@gqbearing.com,shary@gqbearing.com-http://www.bearing-asia.com