


Single Row Tapered Roller Bearing

33100 Series-33122

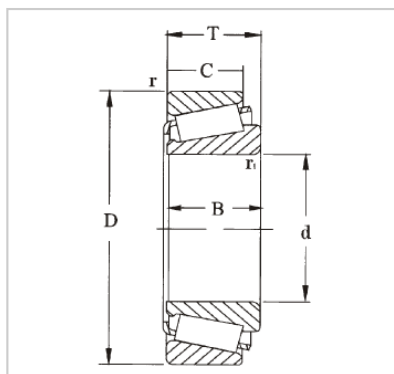

WUXI GUANGQIANG BEARING TRADE CO.,LTD

Designação	33122
Dimensões principais (mm)	
d1	110
D	180
B	56
Classificações básicas de carga (KN)	
dyc (Cr)	369
stc (Cor)	630
Pu	67
Avaliações de velocidade (rpm)	
Classificações de velocidade	2600
Limitando a velocidade	3400
Peso (Kg)	5.55
ISO335	
Dimensões (ABMA)	3EE
Dimensões [mm]	
d	110
d1	146
B	56
C	43
r1,2 (min)	2.5
r3,4 (min)	2
uma	44
Dimensões de abutment e filete [mm]	
da (max)	121
db (min)	121
Da (min)	155
Da (max)	170
Db (min)	174
Ca (min)	9
Cb (min)	13
ra (max)	2
rb (max)	2
Valor	
e	0.43
Y	1.4
Yo	0.8

GQZ high quality 33100 Series Single Row Tapered Roller Bearing

Tapered roller bearings have tapered inner and outer raceways and rollers to handle simultaneous radial and thrust loads. Their axial load carrying capacity is directly related to the contact angle of the rollers and raceway shaft.

They are available in single-row, double-row, and four-row designs. The individual parts of tapered roller bearings are commonly sold separately as cups and cones. Cones contain the roller assembly and inner ring while cups include the outer ring. Full assembly units contain both the cup and cone. As separable bearings, different designs and sizes are available to accommodate a variety of applications.

Wuxi Guangqiang Bearing Trade Co.,Ltd-Tel:86-510-82601571-Email:gq@gqbearing.com,shary@gqbearing.com-http://www.bearing-asia.com