


Spherical Roller Bearing

BS Series



WUXI GUANGQIANG BEARING TRADE CO.,LTD

BEARING

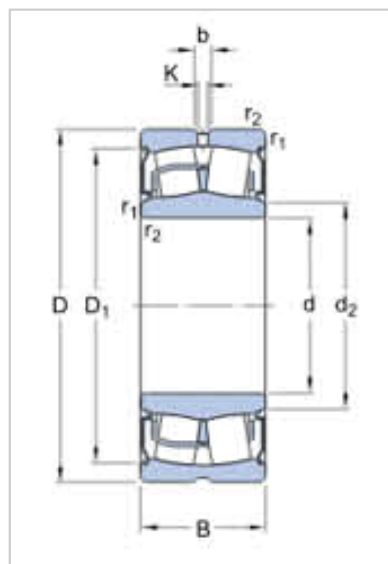

Designation		Principal dimensions (mm)			Basic load ratings (kN)		Limiting Speed	Weight (kg)
Cylindrical Bore	Taper Bore	d	D	B	Dyc Cr	Stc Cor		
BS2-2217-2CS	BS2-2217-2CSK	85	150	44	285	325	1100	3.00
BS2-2218-2CS	BS2-2218-2CSK	90	160	48	325	375	1000	3.70
BS2-2220-2CS	-	100	180	55	425	490	900	5.50
BS2-2224-2CS	-	120	215	69	630	765	750	9.75
BS2-2315-2CS	-	75	160	64	440	475	950	6.54
BS2-2216-2CS	BS2-2216-2CSK	80	140	40	236	270	1200	2.40
BS2-2213-2CS	BS2-2213-2CSK	65	120	38	193	216	1500	1.60
BS2-2214-2CS	BS2-2214-2CSK	70	125	38	208	228	1400	1.80
BS2-2215-2CS	BS2-2215-2CSK	75	130	38	212	240	1300	2.10
BS2-2211-2CS	BS2-2211-2CSK	55	100	31	125	127	1700	1.00
BS2-2212-2CS	BS2-2212-2CSK	60	110	34	156	166	1600	1.30
BS2-2207-2CS	-	35	72	28	86.5	85	2400	0.52
BS2-2208-	BS2-2208-	40	80	28	96.5	90	2200	0.57

2CS	2CSK							
BS2-2209- 2CS	BS2-2209- 2CSK	45	85	28	102	98	2000	0.66
BS2-2210- 2CS	B52-2210- 2CSK	50	90	28	104	108	1900	0.70
BS2-2206- 2CS	-	30	62	25	64	60	2800	0.34